

EL-UG24E4G-POE

비관리형 L2 POE+ 스위치



EL-UG24E4G-POE는 기가비트 이더넷 POE 24포트를 다운링크로 제공하고 기가비트 SFP/UTP 콤보 4포트를 업링크로 제공하는 비관리형 L2 POE 스위치입니다.

Feature

- o 10/100/1000Base-T PoE * 24, 100/1000Base-X COMBO * 4
- o 56G Switching Capacity
- o IEEE802.3af/at (POE, POE+) 지원
- o PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power 30W/port
- o The power supply max is 400W
- o DIP 스위치를 이용한 전송 거리 연장, Port isolation, PoE Watchdog

Application

- o CCTV, ITV
- o Campus Network
- o Community Network
- o Wireless AP


Specification

Network Protocol	IEEE802.3i 10Base-T IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X IEEE802.3u 1000Base-FX
Fixed port	10/100/1000M Base-T PoE * 24 1000Base-X SFP Combo * 4
POE port	Port 1-24 support PoE @ IEEE802.3af/at
Switching Capacity	56Gbps
Forwarding Rate	41.66Mpps
FLASH / RAM	256MB / 512MB
Buffer Memory	4M
MAC table	16K
VLAN	Port based VLAN (4K)
Twisted Pair Transmission	10BASE-T: Cat5 UTP (≤100 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-TX: Cat5 or later UTP (≤100 meter)
Power Supply Pin	Default 1/2(+), 3/6(-)
MAX Power Per Port	30W
Total PWR / Input Voltage	400W (100-240V)
Power Consumption	Standby:<5W; Full load:<400W
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-28(Link/Act)/ (Orange) POE: PoE(Green)
Feature	With the Dial code switch, support port priority by default. E1: 1-8port Extend transmission distance and speed change (limit 10Mbps) E2: 9-16port Extend transmission distance and speed change (limit 10Mbps) E3: 17-24port Extend transmission distance and speed change (limit 10Mbps) V: Turn on, 1-24 Port support each port Isolation & VLAN; D: Turn on, 1-24 Port support AI-PoE Network self-healing mode (PoE Watchdog function), Automatic solve the camera problem &reduce after-sale.

Specification

Size	440*290*44.5mm(W*D*H)
Power	AC100~240VAC (auto-adaptable), 50-60Hz
Environment	Working temperature: -20-55°C Storage temperature: -40-75°C Humidity: 5-90% non condensing

Dimension

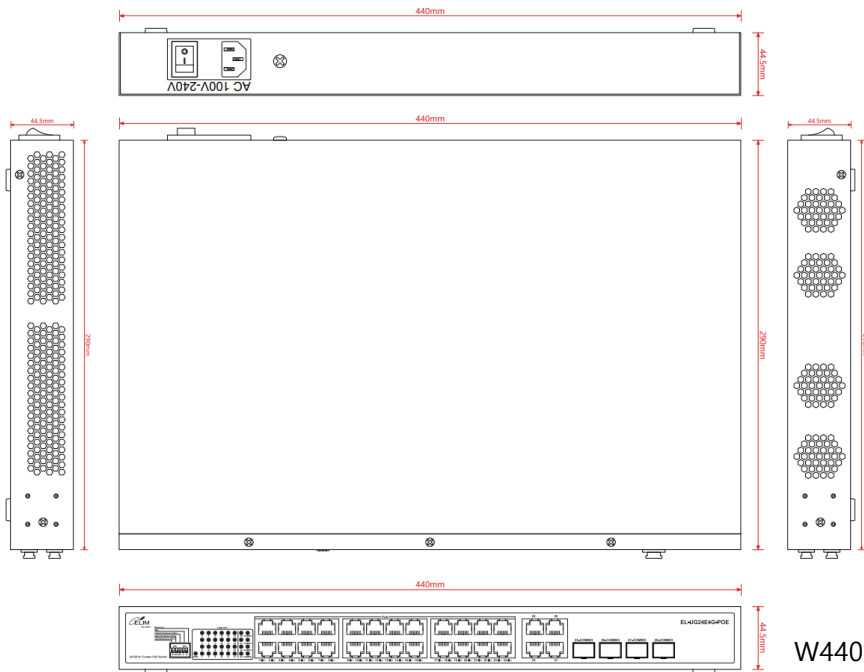

W440 x D290 x H44.5

4F, 2-dong,234, Saneop-ro 155beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Republic of Korea
Tel : 031-257-7157 / Fax : 031-257-7159

E-mail : elimopt@elimopt.co.kr / Web : <http://www.elimopt.co.kr/>